

MINIMUM NAILING REQUIREMENTS

B37019C


	COMMON WIRE NAIL						COMMON SPIRAL NAIL				
	1.50	2.00	2.25	2.50	3.00	3.25	3.50	2.50	3.00	3.25	3.50
Nail Length (inches) :	0.092	0.112	0.116	0.128	0.144	0.144	0.160	0.109	0.122	0.122	0.152
Nail Diameter (inches) :											

Minimum Spacing in Nail Diameters	MINIMUM SPACING (INCHES) S-P-F										
	1.47	1.79	1.86	2.05	2.31	2.31	2.56	1.74	1.95	1.95	2.43
Spacing parallel to grain (16 x dia.)	1.11	1.34	1.39	1.54	1.73	1.73	1.92	1.31	1.46	1.46	1.82
End distance parallel to grain (12 x dia.)	0.74	0.89	0.93	1.02	1.15	1.15	1.28	0.87	0.98	0.98	1.22
Spacing perpendicular to grain (8 x dia.)	0.37	0.45	0.46	0.51	0.58	0.58	0.64	0.44	0.49	0.49	0.61
Edge distance perpendicular to grain (4 x dia.)											

Minimum Spacing in Nail Diameters	MINIMUM SPACING (INCHES) D FIR-L										
	1.84	2.24	2.32	2.56	2.88	2.88	3.20	2.18	2.44	2.44	3.04
Spacing parallel to grain (20 x dia.)	1.38	1.68	1.74	1.92	2.16	2.16	2.40	1.64	1.83	1.83	2.28
End distance parallel to grain (15 x dia.)	0.92	1.12	1.16	1.28	1.44	1.44	1.60	1.09	1.22	1.22	1.52
Spacing perpendicular to grain (10 x dia.)	0.46	0.56	0.58	0.64	0.72	0.72	0.80	0.55	0.61	0.61	0.76
Edge distance perpendicular to grain (5 x dia.)											

NOTES :

1. Minimum nailing requirements conform to CSA O86-09, Section 10.9.2
2. This table is not valid after April 30, 2013

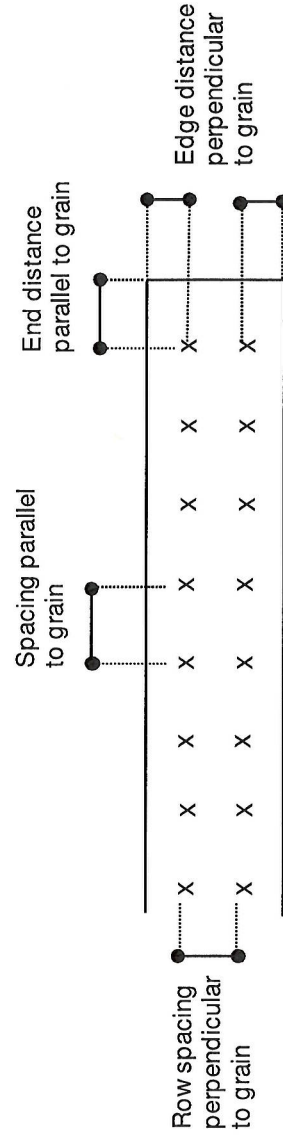

SEP 16 2011